





EGE ATILGAN
ENDÜSTRİYEL MAKİNA



CONTENTS

ABOUT US.....	2
VISION/MISION/OUR QUALITY POLICY.....	4
3,5 TON TRAILER TECHNICAL SPECIFICATIONS.....	5-6
5 TON TRAILER TECHNICAL SPECIFICATIONS.....	7-8
6 TON TRAILER TECHNICAL SPECIFICATIONS.....	9-10
FEED MIXER TECHNICAL SPECIFICATIONS.....	11-12
CHISEL PLOUGH TECHNICAL SPECIFICATIONS.....	14
CONTACT US.....	16



ABOUT US

O-RANGE Agricultural Equipment, a leader in the manufacture of agricultural equipment in Turkey; It was founded by Celal KIRGIL and serves our farmers for over 23 years. The O-RANGE Agricultural Equipment Factory in TIRE District of IZMIR continues to produce 2.000 m² closed and 5.000 m² open area with. CELAL KIRGIL, sons Kenan KIRGIL and Alparslan KIRGIL with 25 Experienced employees.

Responding to our customers' expectations with quality and stability is our first priority. It is our duty to own our products and to be with our customers after sales. It is our first goal to be the best in quality, service, man, and customer relationships and to maintain this image.

The importance and tenderness we have given to quality has brought us these days by growing and strengthening.







VISION

With knowledge and experience at the product for be a pioneer in the industry, without compromising on service quality, reputable, stable, reliable and shared to have a structure. Our employees are determined to meet employee expectations in order to ensure that they focus on customer satisfaction in product design, product quality, delivery speed and after-sales services. They want to become indispensable business partners for the companies and institutions they work with and desire to make continuous improvement a lifestyle. and to use existing resources in the most effective and efficient way.

MISION

Being a leading institution in the world, leading in the region and leading in the sector, using the latest technology that continuously improves the standards according to the customer demands in the production of agricultural tools and affects product quality in this area. Contributing to national production in their sector, based on ethical values, being dynamic and innovative organization with a sense of responsibility towards society.

OUR QUALITY POLICY

We Have Made Our Voice Worldwide, And Have Determined Our Policies!
Taking into consideration the changing and developing conditions of our customers, perceiving their needs and expectations correctly and meeting them continuously and on time as desired, ensuring customer satisfaction, following the technological developments related to our sector, using the most advanced techniques in our production and services, ensuring the participation of our employees to increase our product and service quality, motivations and To ensure customer satisfaction by meeting the needs and expectations of our customers correctly and in a timely manner, by considering the changing and developing conditions of our customers.

3,5 TON TRAILER TECHNICAL SPECIFICATIONS

Loading Capacity : 3500 KG
Empty Weight : 1100 KG
Total Loaded Weight : 4610 KG
Number of Axles : 1
Number Of Wheel : 2
Standard Tires : 750 x 16
Loading Platform Length : 3000 mm
Loading Platform Width : 1600mm
Sideboard Height : 460mm
Total Length : 4255mm
Tipping Angle : 47°

Reinforced 2.5 mm Base Plate
St-52 Quality Steel Axle
Hydraulic Brake
12v Electric System And Lamp





5 TON TRAILER TECHNICAL SPECIFICATIONS

Loading Capacity : 5000 KG

Empty Weight : 1350 KG

Total Loaded Weight : 6350 KG

Number of Axles : 1

Number Of Wheel : 2

Standard Tires : 11.5/80-15.3

Loading Platform Length : 3900 mm

Loading Platform Width : 2000 mm

Sideboard Height : 460mm

Total Length : 4940mm

Tipping Angle : 51°

Reinforced 2.0 mm Base Plate

St-52 Quality Steel Axle

Hydraulic Brake

12v Electric System And Lamp





6 TON TRAILER TECHNICAL SPECIFICATIONS

Loading Capacity : 6000 KG
Empty Weight : 1420 KG
Total Loaded Weight : 7420 KG
Number of Axles : 1
Number Of Wheel : 2
Standard Tires : 11.5/80-15.3
Loading Platform Length : 3900 mm
Loading Platform Width : 2000mm
Sideboard Height : 560 mm
Total Length : 5200 mm
Tipping Angle : 51°

Reinforced 2.5 mm Base Plate
St-52 Quality Steel Axle
Hydraulic Brake
12v Electric System And Lamp





FEED MIXER TECHNICAL SPECIFICATIONS

Capacity : 2m³

Width : 1450 mm


Length : 2000 mm

Height : 1570 mm

Number of Blades : 5 pcs

Machine Weight : 850 kg

Power Required : 10 hp

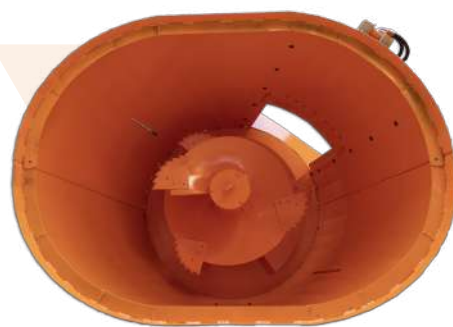



2m³

CHISEL PLOUGH TECHNICAL SPECIFICATIONS

MODEL	NUMBER OF TINES (PIECES)	CLEARANCE(CM)	DISTANCE BETWEEN BEAMS (CM)	WORKING WIDTH (CM)	WORKING DEPTH (CM)	WEIGHT (KG)	POWER REQUIREMENT (HP)
CSLM05	5	50	25	125	30	262	30-35
CSLM07	7	50	25	175	30	327	35-45
CSLM09	9	50	25	225	30	393	45-60
CSLM11	11	50	25	275	30	309	60-70
CSL05	5	62	30	150	45	349	50-60
CSL07	7	62	30	210	45	421	60-80
CSL09	9	62	30	270	45	506	80-90
CSL11	11	62	30	330	45	720	90-100
CSL13	13	62	30	390	45	810	100-110
CSL15	15	62	30	450	45	900	120-140
CSLH05	5	74	30	150	60	410	70-80
CSLH07	7	74	30	210	60	513	80-90
CSLH09	9	74	30	270	60	630	90-110
CSLH11	11	74	30	330	60	823	110-130
CSLH13	13	74	30	390	60	930	130-150
CSLH15	15	74	30	430	60	1010	150-170







CONTACT US

📍 Adress : Ibni Melek OSB Mah.
Tosbi Yol 3. Sokak No:19/1
TIRE
IZMIR
TURKEY

🌐 Website : www.eagriculturalmachines.com
✉ Mail : info@eaendustri.com.tr

☎ Phone : + 90 232 512 60 79
☎ GSM : + 90 534 032 41 46



2020